



HYFFA LED[®]

EXCELLENT BY NATURE





FOLLOW US

ON OUR SOCIAL NETWORK FOR NEW PRODUCTS
LAUNCH AND UPDATES



<https://www.facebook.com/hyffaleds>

<https://www.instagram.com/hyffaled/>

<https://www.youtube.com/@hyffa-ledlights7997>

<https://www.linkedin.com/company/hyffaled/>

www.hyffa.com

HYFFA – Excellent by nature

About HYFFA

HYFFA derives immense pride in manufacturing LED lightings. We have time and again realized and revised our products as an effect of ever-changing market demands and trends. Innovation coupled with passion has been another strong pillar at HYFFA. There is a rising demand for LED lighting solutions over the past years, and this we foresee to be only increasing, and making lights a canvas for the artist in you.

We are a family of 150+ employees focused and striving to deliver premium products that are best in service and cost-effective. We embrace customer satisfaction as one of the highest concerns and parameters for delivering products.

Our products are a breed and breath of superior quality! We at HYFFA, do not believe in accepting quality as a standard but rather as the very machine to produce. We religiously believe that quality without good design, and design without quality, both, are futile when out to application – more so, when we refer to electrical goods. We at HYFFA, are innovating everyday a better LED lighting solution for a better experience for you! Our endeavour has been to be proactively ahead to understand the inventions and innovations in the market. HYFFA is another name for LEDs!

Being a team of highly aspiring and meticulously working employees, we have gained mastery in electrical good like wires, cables, lights, fans, switches, switchgears, etc. For the last 40 years, our existence has been strong and electrifying. We have an established network of 3000+ retailers across the state of Maharashtra.

Amongst the many reasons for our strong presence in the market for past four decades is our vision towards solid commitment, quality and product satisfaction. It is undeniably true that lights play a vital role in giving a space its very aura and life. With improper lightings and solution, the best of spaces may look wary and lifeless.

Whereas a decent place may wow you with elegant and well-designed lighting solution. Our products are designed to provide aesthetic look for residential as well as commercial spaces. We have a deeper range of products, design and utility, which shall help you quench what you seek as apt for your sacred space.

Apart from the vast range of residential and commercial range, we also have an exclusive range of industry grade lighting solutions. We give premium quality touch to each of our range and products. We are Make in India in all our integration.

HYFFA is the right light for every space.
Seek Excellence, Seek Hyffa!

Mission:

To electrify and beautify spaces with the use of LED lights making the world a canvas of unparalleled creativity and festivity all around.

Vision:

To be a leader in the innovation and manufacturing of LED lightings and solutions with meticulous application in order to reach the pinnacle of quality standards.

ALTO SERIES

PRODUCT CODE: HYFARHCOBR3CCT 118
OPTIONS: BLACK & WHITE BODY



TECHNICAL SPECIFICATIONS	HYFARHCOBR3CCT 118-7W	HYFARHCOBR3CCT 118-12W	HYFARHCOBR3CCT 118-18W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	7W	12W	18W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K 3 in 1 / Dimmable & Tunnable with Remote	4000K 3 in 1 / Dimmable & Tunnable with Remote	6500K 3 in 1 / Dimmable & Tunnable with Remote
DIMENSIONS	60 × 63 × 68 mm	75 × 85 × 74 mm	83 × 95 × 91 mm
LUMENS	630	1080	1620
BEAM ANGE	35°	35°	35°



(Remote Optional)

DECO SERIES

PRODUCT CODE: HYFARHCOBR3CCT 128

OPTIONS:

GOLD, ROSE GOLD, GUNMETAL, SILVER, WHITE, BLACK



GOLD



ROSE GOLD



SILVER



GUNMETAL



WHITE




BLACK

TECHNICAL SPECIFICATIONS	HYFARHCOBR3CCT 128-7W	HYFARHCOBR3CCT 128-12W	HYFARHCOBR3CCT 128-18W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	7W	12W	18W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K 3 in 1 / Dimmable & Tunable with Remote	4000K 3 in 1 / Dimmable & Tunable with Remote	6500K 3 in 1 / Dimmable & Tunable with Remote
DIMENSIONS	53 × 63 × 56 mm	73 × 87 × 72 mm	95 × 115 × 87 mm
LUMENS	630	1080	1620
BEAM ANGE	45°	45°	45°



(Remote Optional)

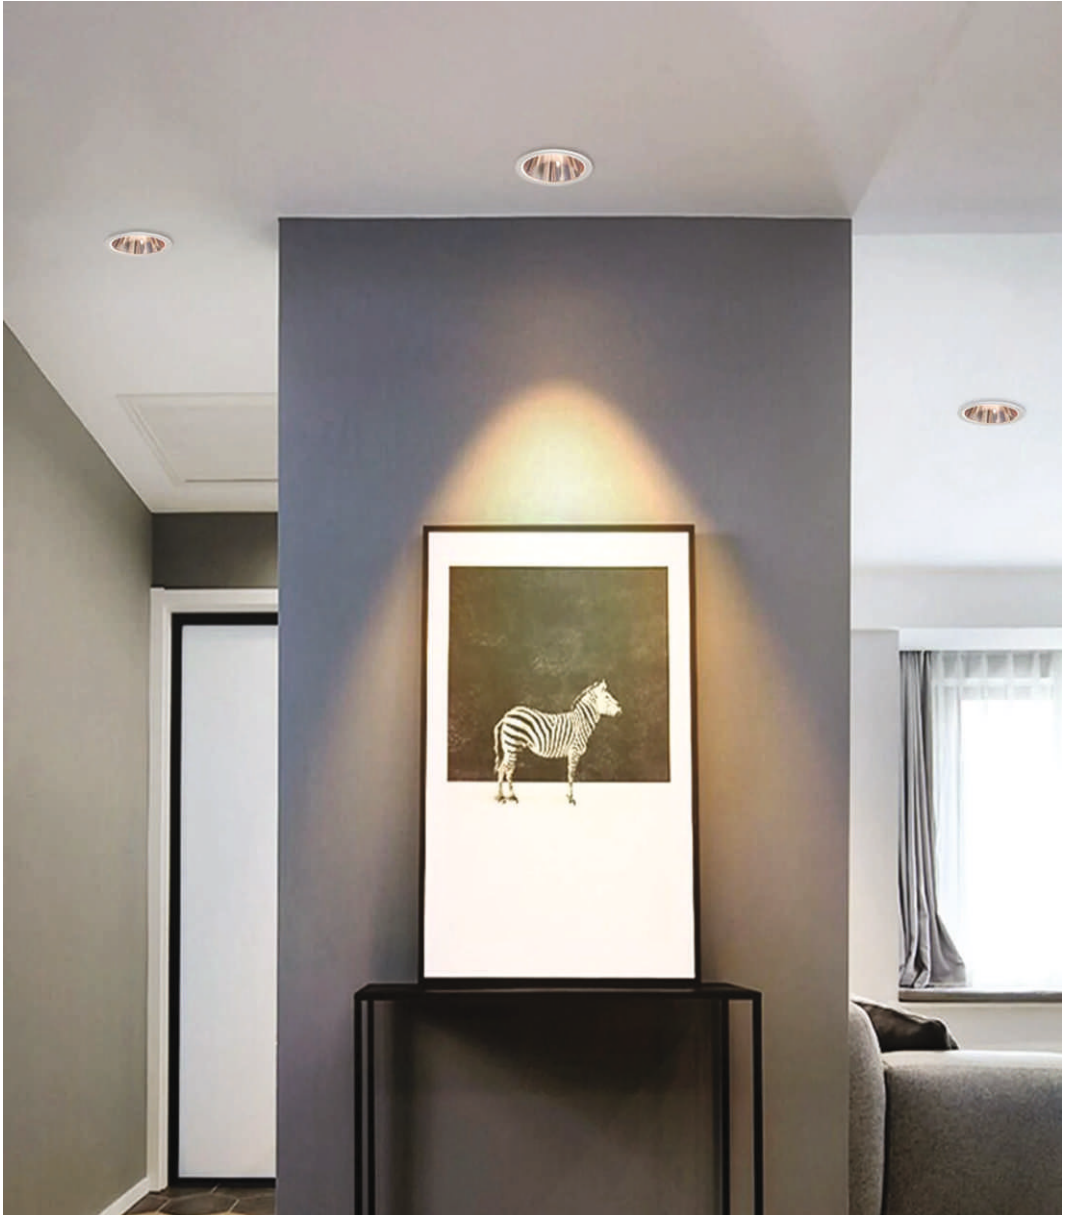

SQUARE BODY COB DOWN LIGHT

PRODUCT CODE: HYFARHCOBS3CCT 138
OPTIONS: BLACK & WHITE BODY



TECHNICAL SPECIFICATIONS	HYFARHCOBS3CCT 138-7W	HYFARHCOBS3CCT 138-12W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	7W	12W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K 4000K 6500K 3 in 1 / Dimmable & Tunable with Remote	3 in 1 / Dimmable & Tunable with Remote
DIMENSIONS	61 × 68 × 75 mm	73 × 80 × 85 mm
LUMENS	630	1080
BEAM ANGE	35°	35°



PIN HOLE COB SERIES

PRODUCT CODE: HYFARHCOBR3CCT 178



TECHNICAL SPECIFICATIONS	HYFARHCOBR3CCT 178-7W	HYFARHCOBR3CCT 178-12W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	7W	12W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3K 4K 6K 3 in 1 / Dimmable & Tunable with Remote	3 in 1 / Dimmable & Tunable with Remote
DIMENSIONS	56 × 75 × 60 mm	61 × 96 × 69 mm
LUMENS	630	1080
BEAM ANGE	15° - 20°	15° - 20°



(Remote Optional)

DECO SURFACE CYLINDER SERIES

PRODUCT CODE : HYFARHCOBRSF-148

OPTIONS:

GOLD, ROSE GOLD, GUNMETAL, SILVER, WHITE, BLACK




GOLD



ROSE GOLD



SILVER



GUNMETAL



WHITE



BLACK

TECHNICAL SPECIFICATIONS	HYFARHCOBRSF-148-7W	HYFARHCOBRSF-148-12W	HYFARHCOBRSF-148-18W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	7W	12W	18W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3 in 1 / Dimmable & Tunnable with Remote	3 in 1 / Dimmable & Tunnable with Remote	3 in 1 / Dimmable & Tunnable with Remote
DIMENSIONS	55 x 60 mm	68 x 68 mm	96 x 130 mm
BEAM ANGE	25°- 30°	25°- 30°	25°- 30°



IP65

TECHNICAL SPECIFICATIONS	HYFARHCOBRSF.IP65 7W	HYFARHCOBRSF.IP65 12W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	7W	12W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K	3000K
LUMENS	630	1080
BEAM ANGE	25° - 30°	25° - 30°

FANCY 3W


PRODUCT CODE: HYFARHCOBR-278
OPTIONS: ROSE GOLD, BLACK & WHITE BODY



ROSE GOLD



BLACK



WHITE

TECHNICAL SPECIFICATIONS	HYFARHCOBR-278 3W
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	3W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K, 4000K, & 6500K
DIMENSIONS	30 × 37 × 31 mm
LUMENS	630
BEAM ANGE	20°



TRACK LIGHT - AVAILABLE IN 3 IN 1

PRODUCT CODE: HYFARHTRAKL-138
OPTIONS: BLACK & WHITE BODY



WHITE



BLACK



TECHNICAL SPECIFICATIONS	HYFARHTRAKL 138-12W	HYFARHTRAKL 138-20W	HYFARHTRAKL 138-30W	HYFARHTRAKL 138-12W - 3 IN 1	HYFARHTRAKL 138-20W - 3 IN 1
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	12W	20W	30W	12W	20W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
DIMENSIONS	127 × 49 mm	156 × 49 mm	182 × 76 mm		
LUMENS	1080	1800	2700		
BEAM ANGE	25° - 30°	25° - 30°	25° - 30°		


LED MAGNETIC TRACK LIGHTS

PRODUCT CODE: HYFARHTRAKL-138
OPTIONS: BLACK & WHITE BODY



SR NO.	PRODUCT PICTURE	PRODUCT CODE	POWER
1		MAGNETIC TRACK CHANNEL RECESSED	1MTR
			2MTR
			3MTR
2		MAGNETIC TRACK CHANNEL SURFACE	1MTR
			2MTR
			3MTR
3		MAGNETIC LAZER	6W
			12W
4		MAGNETIC PROFILE	10W
			20W
5		MAGNETIC TRACK	10W
			20W
6		DOUBLE SOFT	
7		JOINTER	
8		JOINTER	
9		RECESSED CORNER	
10		RECESSED CORNER	

LED MAGNETIC TRACK LIGHTS

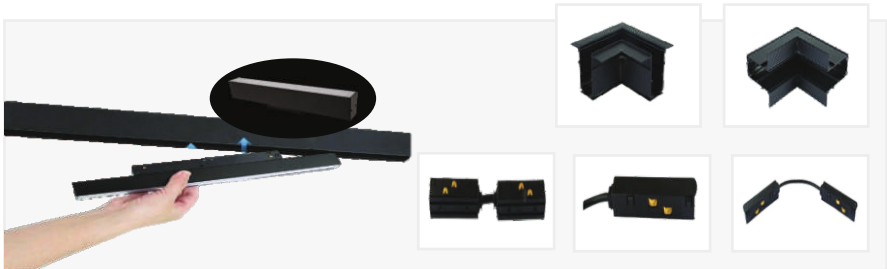

OUTDOOR WALL LIGHT IP65

PRODUCT CODE: HYFARHMTSTPLT 138
HYFARHMTSTPLT 148



TECHNICAL SPECIFICATIONS	HYFARHMTSTPLT 138- 4W	HYFARHMTSTPLT 148-8W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	4W	8W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	Warm White (WW) 3000k	Warm White (WW) 3000k
LUMENS	360	720
SIZE	H W L 30 X 55 X 130	H W L 30 X 60 X 170



OUTDOOR WALL LIGHT IP65

PRODUCT CODE: HYFARHMTUPDN 158

TECHNICAL SPECIFICATIONS	HYFARHMTUPDN 158-2W
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	2W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	Warm White (WW) 3000k
SIZE	80 X 51 X 62
LUMENS	200



PRODUCT CODE: HYFARHMT2WAY 178 HYFARHMT4WAY 188



TECHNICAL SPECIFICATIONS	HYFARHMT2WAY 178-2W	HYFARHMT4WAY 188-4W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	2*1W	4*1 W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	Warm White (WW) 3000k	Warm White (WW) 3000k
SIZE	45X 60 X 55	50X 70 X 70

OUTDOOR WALL LIGHT IP65

PRODUCT CODE: HYFARHMTUPDN2WY 198
HYFARHMTUPDN4WY 198
HYFARHMTUPDN6WY 198
HYFARHMTUPDN8WY 198
HYFARHMTUPDN10WY 198



TECHNICAL SPECIFICATIONS	HYFARHMT UPDN2WY 198-2W	HYFARHMT UPDN4WY 198-4W	HYFARHMT UPDN6WY 198-6W	HYFARHMT UPDN8WY 198-8W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	2W	4W	6W	8W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	Warm White (WW) 3000k	Warm White (WW) 3000k	Warm White (WW) 3000k	Warm White (WW) 3000k
SIZES	H L D 80X 76 X 38	H L D 80X 76 X 38	H L D 80X 170X 43	H L D 80X 200X 48
TECHNICAL SPECIFICATIONS	HYFARHMT UPDN10WY 198-10W			
INPUT VOLTAGE	AC 90V ~ 265V			
INPUT POWER	10W			
LED DRIVER	ISOLATED DRIVER			
COLOR TEMPERATURE (CCT)	Warm White (WW) 3000k			
	H L D 80X 270X 50			



DOWNLIGHT

PRODUCT CODE: HYFARHDOWNL3CCT-118
OPTIONS: ROUND / SQUARE



SQUARE



ROUND

TECHNICAL SPECIFICATIONS	HYFARHDOWNL3CCT 118-12W	HYFARHDOWNL3CCT 118-18W	HYFARHDOWNL3CCT 118-24W
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	12W	18W	24W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3K 4K 6K 3 in 1 / Dimmable & Tunable with Remote	3K 4K 6K 3 in 1 / Dimmable & Tunable with Remote	3K 4K 6K 3 in 1 / Dimmable & Tunable with Remote
DIMENSIONS	110 × 50 × 120 mm	145 × 54 × 155 mm	165 × 54 × 175 mm
3K 4K 6K	1200	1800	2400
BEAM ANGLE	85-90°	85-90°	85-90°



(Remote Optional)

LED BOLLARD LIGHTS

PRODUCT CODE: HYFARHGRBLD-110
BULB HOLDER TYPE E-27 BASE



300MM

650MM

800MM



LED BOLLARD LIGHTS

**PRODUCT CODE: HYFARHGRBLD-120
BULB HOLDER TYPE E-27 BASE**



LED BOLLARD LIGHTS

PRODUCT CODE: HYFARHGRBLD- 130
BULB HOLDER TYPE E-27 BASE



300MM

650MM

800MM



LED BOLLARD LIGHTS

PRODUCT CODE: HYFARHGRBLD-140
BULB HOLDER TYPE E-27 BASE



300MM

650MM

800MM



LED BOLLARD LIGHTS

PRODUCT CODE: HYFARHGRBLD-150
BULB HOLDER TYPE E-27 BASE



300MM



650MM



800MM



OUTDOOR WALL LIGHT IP65

PRODUCT CODE: HYF-DECOWALL-LAMP-226-6W-IP65



TECHNICAL SPECIFICATIONS	HYF-DECOWALL-LAMP-226-6W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	6W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	45×240×120
LUMENS	540

PRODUCT CODE: HYF-DECOUPDOWN-LAMP-223-10W-IP65



TECHNICAL SPECIFICATIONS	HYF-DECOUPDOWN-LAMP-223-10W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	10W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	72×60×230
LUMENS	900

PRODUCT CODE: HYF-WALLBULKHEAD-PC-213-7W-IP65



TECHNICAL SPECIFICATIONS	HYF-WALLBULKHEAD-PC-213-7W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	7W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	124×124 ×30
LUMENS	630

OUTDOOR WALL LIGHT IP65

PRODUCT CODE: HYF-DECODOWNWALL-LAMP-226-6W-IP65



TECHNICAL SPECIFICATIONS	HYF-DECODOWNWALL-LAMP-226-6W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	6W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	100×160×86
LUMENS	540

PRODUCT CODE: HYF-DECOWALL-LAMP-248-15W-IP65



TECHNICAL SPECIFICATIONS	HYF-DECOWALL-LAMP-248-15W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	15W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	161× 132 ×108
LUMENS	1350

PRODUCT CODE:HYF-DECOWALL-LAMP-222-6W-IP6



TECHNICAL SPECIFICATIONS	HYF-DECOWALL-LAMP-222-6W-IP6
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	6W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	80×80×230
LUMENS	540

OUTDOOR WALL LIGHT IP65**PRODUCT CODE:HYF-WALLBULKHEAD-PC -220-7W-IP65:**

TECHNICAL SPECIFICATIONS	HYF-WALLBULKHEAD-PC -220-7W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	7W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	140×55
LUMENS	540

PRODUCT CODE: HYF-WALLSTEPBULKHEAD-PC-217-7W-IP65


TECHNICAL SPECIFICATIONS	HYF-WALLSTEPBULK HEAD-PC-217-7W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	7W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	150×27
LUMENS	630

OUTDOOR WALL LIGHT IP65

PRODUCT CODE:

HYF-DECOWALL-LAMPRO-228-10W-IP65

HYF-DECOWALL-LAMPSQ-229-10W-IP65



TECHNICAL SPECIFICATIONS	HYF-DECOWALL-LAMPRO-228-10W-IP65	HYF-DECOWALL-LAMPSQ-229-10W-IP65
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	10W	10W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K	3000K
DIMENSIONS	50×150 ×150	50×150 ×150
LUMENS	900	

PRODUCT CODE: HYF-DECOWALL4WAY-227-12W-IP65

TECHNICAL SPECIFICATIONS	HYF-DECOWALL4WAY-227-12W-IP65
INPUT VOLTAGE	AC 90V ~ 265V
INPUT POWER	12W
LED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K
DIMENSIONS	52×100×100
LUMENS	1080



OUTDOOR WALL LIGHT IP65

**PRODUCT CODE: HYF-ARHDOWNLIGHT-232-6W- IP65
HYF-ARHUPDOWNLIGHT-233-12W- IP65**

TECHNICAL SPECIFICATIONS	HYF-ARHDOWNLIGHT-232-6W- IP65	HYF-ARHUPDOWNLIGHT-233-12W- IP65
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	6W	12W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K	3000K
DIMENSIONS	88×65×100	88×65×130
LUMENS	540	1080



**PRODUCT CODE: HYF-ARHDOWN LIGHT-230-6W-IP65
HYF-ARHUPDOWNLIGHT-LAMP-231-12W-IP65
LENS TYPE**



TECHNICAL SPECIFICATIONS	HYF-ARHDOWNLIGHT-230-6W-IP65	HYF-ARHUPDOWNLIGHT-LAMP-231-12W-IP65
INPUT VOLTAGE	AC 90V ~ 265V	AC 90V ~ 265V
INPUT POWER	6W	12W
LED DRIVER	ISOLATED DRIVER	ISOLATED DRIVER
COLOR TEMPERATURE (CCT)	3000K	3000K
DIMENSIONS	100×65×95	100×65×115
LUMENS	540	1080

LED Bulb



MODEL NO.	HYF-BLB-0.5W	HYF-BLB-3W	HYF-BLB-5W	HYF-BLB-7W	HYF-BLB-9W
POWER	1W	3W	5W	7W	9W
LED SIZE	2835	2835	2835	2835	2835
BODY COLOR	White	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20	IP20
COLOR TEMP.	3000K, Red, Green, Blue, Yellow, White, Orange, Pink	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K
LUMENS OUTPUT		>300Lm	>500Lm	>700Lm	>900Lm
BEAM ANGLE	>120°	>120°	>120°	>120°	>120°
MOUNTING	B22 & E27	B22 & E27	B22 & E27	B22 & E27	B22 & E27

MODEL NO.	HYF-EMB-9W	HYF-BLB-12W	HYF-BLB-15W	HYF-BLB-18W	HYF-BLB-23W
POWER	9W	12W	15W	18W	23W
LED SIZE	2835	2835	2835	2835	2835
BODY COLOR	White	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20	IP20
COLOR TEMP.	6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K
LUMENS OUTPUT	>900Lm	>1200Lm	>1500Lm	>1800Lm	>2300Lm
BEAM ANGLE	>120°	>120°	>120°	>120°	>120°
MOUNTING	B22	B22 & E27	B22 & E27	B22 & E27	B22 & E27

Hammer Bulb



MODEL NO.	HYF-HMB-30W	40W	HYF-HMB-50W
POWER	30W	40W	50W
LED SIZE	2835	2835	2835
BODY COLOR	White	White	White
IP RATING	IP20	IP20	IP20
COLOR TEMP.	3000K, & 6500K	3000K, & 6500K	3000K, 4000K & 6500K
LUMENS OUTPUT	>3000Lm	>4000Lm	>5000Lm
BEAM ANGLE	>270°	>270°	>270°
MOUNTING	B22, E27	B22, E27	B22, E27 & E14




LED Batten



MODEL NO.	HYF-BTT-5W	HYF-BTT-10W	HYF-BTT-20W	HYF-BTT-24W	HYF-BTT-20W TRICCT	HYF-BTT-40W
POWER	5W	10W	20W	24W	20W	40W
LED SIZE	2835	2835	2835	2835	2835	2835
BODY COLOR	White	White	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20	IP20	IP20
COLOR TEMP.	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3 in 1	3000K, 4000K & 6500K
LUMENS OUTPUT	>500Lm	>1000Lm	>2000Lm	>2400Lm	>2000Lm	>4000Lm
BEAM ANGLE	>120°	>120°	>120°	>120°	>120°	>120°
MOUNTING	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling




LED Drivers IP65 (SMPS)

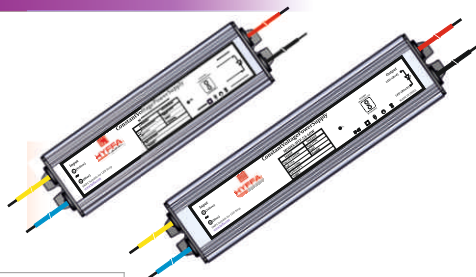

MODEL NO.	HYF-3A-12V-36W-IP65	HYF-5A-12V-60W-IP65
POWER	36W	60W
BODY COLOR	Grey	Grey
IP RATING	IP 65	IP 65
MATERIAL	Aluminum heavy body	Aluminum heavy body

LED Drivers IP20 (SMPS)

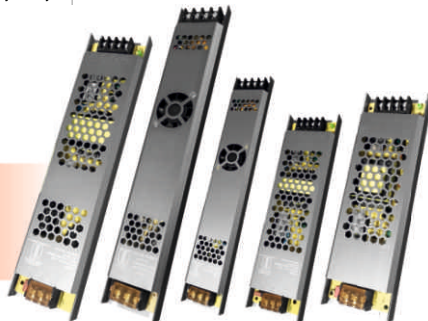

MODEL NO.	HYF-2A-12V-24W-IP20	HYF-3A-12V-36W-IP20	HYF-5A-12V-60W-IP20	HYF-10A-12V-120W-IP20
POWER	24W	36W	60W	40W
TYPE	Regular Slim	Regular Slim	Ultra Slim	Ultra Slim
IP RATING	IP20	IP20	IP20	IP20

MODEL NO.	HYF-12.5A-12V-150W-IP20	HYF-16.5A-12V-200W-IP20	HYF-25A-12V-300W-IP20	HYF-33A-12V-396W-IP20
POWER	150W	200W	300W	396W
TYPE	Ultra Slim	Ultra Slim	Ultra Slim	Ultra Slim
IP RATING	IP20	IP20	IP20	IP20

SOLAR Powered Street Light

PRODUCT CODE:

HYF-SOLAR-STL-20W
HYF-SOLAR-STL-40W
HYF-SOLAR-STL-60W
HYF-SOLAR-STL-80W



Remote

Inbuilt Radar Sensor & Motion Sensor

MODEL No.	HYF-SOLAR-STL-20W	HYF-SOLAR-STL-40W	HYF-SOLAR-STL-60W	HYF-SOLAR-STL-80W
Housing Type	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
POWER	20W	40W	60W	80W
LED CHIPS	5730 / 48PCS	5730 / 96PCS	5730 / 144PCS	5730 / 192PCS
HOUSE	ABS 39*19.4*5.2cm	ABS 48.5*22*5.3cm	ABS 62.5*23.9*5.5cm	ABS 720*240cm
BATTERY	32650 3.2V/5Ah	32650 3.2V/10Ah	32650 3.2V/15Ah	32650 3.2V/20Ah
SOLAR PANEL	6V/6W polycrystalline silicon 298*187mm	6V/9W polycrystalline silicon 397*212mm	6V/14W polycrystalline silicon 508*231mm	6V/16W polycrystalline silicon 608*231mm
LIGHTING TIME	10-12H	10-12H	10-12H	10-12H
CHARGING TIME	8-10H	8-10H	8-10H	8-10H
WATERPROOF	Ip65	Ip65	Ip65	Ip65



Street Light



MODEL NO.	HYF-LST-25W	HYF-LST-36W	HYF-LST-50W	HYF-LST-72W	HYF-LST-100W	HYF-LST-150W
POWER	25W	36W	50W	72W	1000W	150W
LED SIZE	2835	2835	2835	2835	2835	2835
BODY COLOR	Grey	Grey	Grey	Grey	Grey	Grey
IP RATING	IP 65	IP 65	IP 65	IP 65	IP 65	IP 65
COLOR TEMP.	3000K & 6500K	3000K & 6500K	3000K & 6500K	3000K & 6500K	3000K & 6500K	3000K 4000K & 6500K
LUMEN OUTPUT	>2500Lm	>3600Lm	>5000Lm	>7200Lm	>10000Lm	>15000Lm
MATERIAL	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure
BEAM ANGLE	>145°& 50°	>135°& 45°	>135°& 45°	>135°& 45°	>135°& 45°	>135°& 45°
MOUNTING	Pole mount	Pole mount	Pole mount	Pole mount	Pole mount	Pole mount

Sensor Based Street Light



MODEL NO.	HYF-SLST-25W	HYF-SLST-36W	HYF-SLST-50W
POWER	25W	36W	50W
LED SIZE	2835	2835	2835
BODY COLOR	Grey	Grey	Grey
IP RATING	IP 65	IP 65	IP 65
COLOR TEMP.	3000K & 6500K	3000K & 6500K	3000K & 6500K
LUMEN OUTPUT	>2500Lm	>3000Lm	>3600Lm
MATERIAL	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure
BEAM ANGLE	>145°& 50°	>150°& 50°	>135°& 45°
MOUNTING	Pole mount	Pole mount	Pole mount

- Inbuilt Sensor
- Auto ON/OFF Dusk & Dawn

Street Light



MODEL NO.	HYF-EEST-59W	HYF-EEST-30W	HYF-EEST- 52 W	HYF-EEST-66W
POWER	25W	30W	40W	60W
LED SIZE	2835	2835	2835	2835
BODY COLOR	Grey	Grey	Grey	Grey
IP RATING	IP65	IP65	IP65	IP65
COLOR TEMP.	3000K & 6500K	3000K & 6500K	3000K & 6500K	3000K & 6500K
LUMEN OUTPUT	>2400Lm	>3000Lm	>4000Lm	>6000Lm
MATERIAL	Pressure die cast aluminium enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure
BEAM ANGLE	>120°	>120°	>120°	>120°
MOUNTING	Pole mount	Pole mount	Pole mount	Pole mount



PCP Panel




MODEL NO.	HYF-PCP-5W	HYF-PCP-8W	HYF-PCP-12W
DIA/LENGTH	85mm	120mm	170mm
HEIGHT	32mm	35mm	35mm
WEIGHT	40gm	44gm	82gm
CUT OUT	65 mm	100mm	150mm
TYPE	Round/ Square	Round/ Square	Round/ Square
CATEGORY	LED Panel	LED Panel	LED Panel
INPUT POWER	5W	8W	12W
INPUT VOLTAGE (V)	220-240	220-240	220-240
POWER FACTOR	>0.90	>0.90	>0.90
THD%	<20%	<20%	<20%
LUMENS	450	800	1200
DRIVER EFFICIENCY	≥ 85	≥ 85	≥ 85
OPERATING VOLTAGE (V)	140V~300V AC	140V~300V AC	140V~300V AC
OPERATING FREQUENCY (HZ)	47Hz~53Hz	47Hz~53Hz	47Hz~53Hz
DRIVER TYPE	NON-ISOLATED	NON-ISOLATED	NON-ISOLATED
HIGH VOLTAGE PROTECTION	380 V for 30 min	380 V for 30 min	380 V for 30 min





HYF-PCP-15W	HYF-PCP-20W	HYF-PCP-15W-3-IN-1	HYF-PCP-10W-3-IN-1
170mm	220mm		
35mm	35mm	35mm	35mm
82gm	96mm	82gm	82gm
150mm	200mm	155mm	155mm
Round/ Square	Round/ Square	Round/ Square	Round/ Square
LED Panel	LED Panel	LED Panel	LED Panel
15W	20W	15W	15W
220-240	220-240	220-240	220-240
>0.90	>0.90	>0.90	>0.90
<20%	<20%	<20%	<20%
1500	2000	1500	1000
≥ 85	≥ 85	≥ 85	≥ 85
140V~300V AC	140V~300V AC	140V~300V AC	140V~300V AC
47Hz~53Hz	47Hz~53Hz	47Hz~53Hz	47Hz~53Hz
NON-ISOLATED	NON-ISOLATED	NON-ISOLATED	NON-ISOLATED
380 V for 30 min	380 V for 30 min	380 V for 30 min	380 V for 30 min

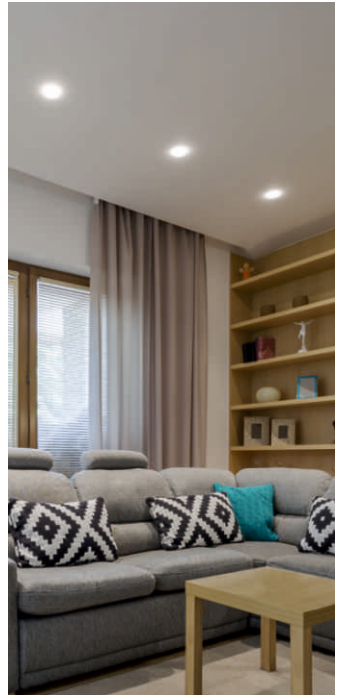

Rimless Surface Panel



MODEL NO.	HYF-RSFP -6W	HYF-RSFP -12W	HYF-RSFP -18W	HYF-RSFP -24W
DIA/LENGTH	120mm	120mm	170mm	170mm
HEIGHT	32mm	38mm	35mm	35mm
WEIGHT	40gm	44gm	82gm	82gm
CUT OUT	80mm	105mm	155mm	155mm
TYPE	Round/ Square	Round/ Square	Round/ Square	Round/ Square
CATEGORY	LED Panel	LED Panel	LED Panel	LED Panel
INPUT POWER	5W	8W	12W	15W
INPUT VOLTAGE (V)	220-240	220-240	220-240	220-240
POWER FACTOR	>0.90	>0.90	>0.90	>0.90
THD%	<20%	<20%	<20%	<20%
LED LUMENS	90	90	90	90
DRIVER EFFICIENCY	≥ 85	≥ 85	≥ 85	≥ 85
OPERATING VOLTAGE (V)	140V~300V AC	140V~300V AC	140V~300V AC	140V~300V AC
OPERATING FREQUENCY (HZ)	47Hz~53Hz	47Hz~53Hz	47Hz~53Hz	47Hz~53Hz
DRIVER TYPE	Drive on Board.	Drive on Board.	Drive on Board.	Drive on Board.
HIGH VOLTAGE PROTECTION	380 V for 30 min	380 V for 30 min	380 V for 30 min	380 V for 30 min



2-IN-1 Panel



MODEL NO.	HYF-3+3-6W	HYF-6+3-9W	HYF-12+4-16W	HYF ¹² +4 SURFACE16W
POWER	6W	9W	16W	16W
LED SIZE	2835	2835	2835	2835
BODY COLOR	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20
COLOR TEMP	W/W.W., W/G, W/B, W/P, W/PGB	W/W.W., W/G, W/B, W/P, W/PGB	W/W.W., W/G, W/B, W/P, W/PGB	W/W.W., W/G, W/B, W/P, W/PGB
LUMEN OUTPUT	>480Lm	>720Lm	>1280Lm	>1280Lm
MATERIAL	Extruded aluminum enclosure	Extruded aluminum enclosure	Extruded aluminum enclosure	Extruded aluminum enclosure
BEAM ANGLE	>120°	>120°	>120°	>120°
MOUNTING	Ceiling mount	Ceiling mount	Ceiling mount	Ceiling mount



LED Flicker Free Metal Panel

MODEL NO.	HYF-FLKRF-3W	HYF-FLKRF-6W	HYF-FLKRF-12W	HYF-FLKRF-15W
POWER	3W	6W	12W	15W
LED SIZE	2835	2835	2835	2835
BODY COLOR	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20
COLOR TEMP	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K
LUMEN OUTPUT	>300Lm	>600Lm	>1200Lm	>1500Lm
MATERIAL	Metal body material	Metal body material	Metal body material	Metal body material
BEAM ANGLE	>120°	>120°	>120°	>120°
MOUNTING	False Ceiling	False Ceiling	False Ceiling	False Ceiling

HYF-FLKRF-18W	HYF-FLKRF-22W	HYF-FLKRF-25W
18W	22W	25W
2835	2835	2835
White	White	White
IP20	IP20	IP20
3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K
>1800Lm	>2200Lm	>2500Lm
Metal body material	Metal body material	Metal body material
>120°	>120°	>120°
False Ceiling	False Ceiling	False Ceiling




Rope Lights



DESCRIPTION	COLORS	LENGTH
2835 120 LED PER MTR	3000K Red , Blue, Green, Tiranga	50 mtr. Roll 18 mtr. Roll
5730 120 LED PER MTR	3000K	50 mtr. Roll
3014 108 LED PER MTR	3000K	100 mtr. Roll

LED Strip



MODEL NO.	HYF-ST 2835-60 LED Per Meter	HYF-ST 2835-120 LED Per Meter	HYF-ST 2835-240 LED Per Meter	HYF-ST 5050-RGB 60 LED Per Meter
POWER	25W	50W	100W	72W
TYPE	Flexible Strip	Flexible Strip	Flexible Strip	Flexible Strip
LED TYPE	2835	2835	2835	5050
COLOR TEMP.	White, Warm White, Ice Blue, blue, Natural White, Pink, Purple, Orange, Green, Red, Lemon Yellow, RGB, Amber	White, Warm White, Ice Blue, blue, Natural White, Pink, Purple, Orange, Green, Red, Lemon Yellow, RGB, Amber	3000K, 4000K, 6500K	Multicolour RGB
IP RATING	IP20	IP20	IP20	IP20



Flood lights EFL



MODEL NO.	HYF-EFL-30W	HYF-EFL-50W	HYF-EFL-100W
INPUT POWER (W)	30W	50W	100W
INPUT RATED VOLTAGE (V)	220-240VAC	220-240VAC	220-240VAC
OPERATING VOLTAGE RANGE (V)	100V~300VAC	100V~300VAC	100V~300VAC
LUMINOUS FLUX	>0.95	>0.95	>0.95
LUMEN OUTPUT	3000Lm	5000Lm	10000Lm
COLOUR TEMPERATURE	3000K,6500K	3000K,6500K	3000K,6500K
CRI	>80	>80	>80
BEAM ANGLE	Wide	Wide	Wide

MODEL NO.	HYF-EFL-150W	HYF-EFL-200W	HYF-EFL-300W	HYF-EFL-350W	HYF-EFL-400W
INPUT POWER (W)	150W	200W	300W	350W	400W
INPUT RATED VOLTAGE (V)	220-240VAC	220-240VAC	220-240VAC	220-240VAC	220-240VAC
OPERATING VOLTAGE RANGE (V)	100V~300VAC	100V~300VAC	100V~300VAC	100V~300VAC	100V~300VAC
LUMINOUS FLUX	>0.95	>0.95	>0.95	>0.95	>0.95
LUMEN OUTPUT	15000Lm	20000Lm	25000Lm	30000Lm	35000Lm
COLOUR TEMPERATURE	3000K,6500K	3000K,6500K	3000K,6500K	3000K,6500K	3000K,6500K
CRI	>80	>80	>80	>80	>80
BEAM ANGLE	Wide	Wide	Wide	Wide	Wide

Slim flood lights LTFL



MODEL NO.	HYF-SLFL-30W	HYF LTFL 50W	HYF SLFL 100W
POWER	30W	50W	100W
LED SIZE	3030	3030	3030
BODY COLOR	White	White	White
IP RATING	IP65	IP65	IP65
COLOR TEMP.	3000K, 4000K & 6500K	3000K, 4000K & 6500K	3000K, 4000K & 6500K
LUMEN OUTPUT	>3000Lm	>5000Lm	>10000Lm
MATERIAL	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure
BEAM ANGLE	>60°	>90°	>80°
MOUNTING	Wall, Ceiling & Surface	Wall, Ceiling & Surface	Wall, Ceiling & Surface

MODEL NO.	HYF-SLFL-150W	HYF-SLFL-200W
POWER	150W	200W
LED SIZE	3030	3030
BODY COLOR	White	White
IP RATING	IP65	IP65
COLOR TEMP.	3000K, 4000K & 6500K	3000K, 4000K & 6500K
LUMEN OUTPUT	>15000Lm	>20000Lm
MATERIAL	Pressure die cast aluminum enclosure	Pressure die cast aluminum enclosure
BEAM ANGLE	>50°	>50°
MOUNTING	Wall, Ceiling & Surface	Wall, Ceiling & Surface

Junction Box



MODEL NO.	HYF-JB-7W
PRODUCT TYPE	2 Colour Junction Box
INPUT POWER (W)	7W
INPUT RATED VOLTAGE (V)	AC220-240V
INPUT VOLTAGE (V)	50Hz
DRIVER EFFICIENCY	>85%
COLOUR TEMP	White/Orange, White/Warm White, White/Blue, White/Pink, White/Green
CRI	≥80
LED LUMENS	70Lm/W
SURGE PROTECTION	2.5 KV
BEAM ANGLE	120°
MOUNTING	Wall, Ceiling & Surface

Spot Light (Cabinet Light)



MODEL NO.	HYF-SPL-1W	HYF-SPL-3W
POWER	1W	3W
TYPE	Round	Round
LED SIZE	2835	2835
BODY COLOR	Black	Black
IP RATING	IP65	IP65
COLOR TEMP	6500K Blue, Green, Orange, Pink & Red	6500K, 3000K, 4000K Blue, Green, Orange, Pink & Red
LUMEN OUTPUT	>100Lm	>300Lm
MATERIAL	PC	PC
BEAM ANGLE	>24° & 50°	>30° & 60°
MOUNTING	Recessed	Recessed

Striker



MODEL NO.	HYF-STRK-5W
PRODUCT TYPE	Striker
BODY TYPE	PC Body
INPUT POWER (W)	5W
INPUT RATED VOLTAGE (V)	220-240V
INPUT FREQUENCY	50Hz>
DRIVER EFFICIENCY	85%
COLOUR TEMP.	3000k,4000k,6000k,Red,Green,Blue,Pink, Orange
CRI	>80
LED LUMENS	100Lm/W
SURGE PROTECTION	2.5 KV
BEAM ANGLE	120
MOUNTING	Wall, Ceiling & Surface



Moonlight



MODEL NO.	HYF-ML-15W	HYF-ML- 12W	HYF-ML- 9W	HYF-ML- 7W
PRODUCT TYPE	Moonlight	Moonlight	Moonlight	Moonlight
INPUT POWER (W)	15W	12W	9W	7W
INPUT RATED VOLTAGE (V)	AC 140 - 275V	AC 140 - 275V	AC 140 - 275V	AC 140 - 275V
INPUT FREQUENCY	50Hz	50Hz	50Hz	50Hz
DRIVER EFFICIENCY	>85% (inbuilt)	>85% (inbuilt)	>85% (inbuilt)	>85% (inbuilt)
COLOR TEMP.	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
CRI	80	80	80	80
MATERIAL (BODY)	PC	PC	PC	PC
LED LUMENS	100Lm/W	100Lm/W	100Lm/W	100Lm/W
SURGE PROTECTION	2.5KV	2.5KV	2.5KV	2.5KV
BEAM ANGLE	120°	120°	120°	120°
MOUNTING	Wall, Ceiling & Surface	Wall, Ceiling & Surface	Wall, Ceiling & Surface	Wall, Ceiling

MODEL NO.	HYF-ML-10W 3in1	HYF-ML-15W 3in1
PRODUCT TYPE	Moonlight	Moonlight
INPUT POWER (W)	10W	15W
INPUT RATED VOLTAGE (V)	AC 140 - 275V	AC 140 - 275V
INPUT FREQUENCY	50Hz	50Hz
DRIVER EFFICIENCY	>85% (inbuilt)	>85% (inbuilt)
COLOR TEMP.	3in1	3in1
CRI	80	80
MATERIAL (BODY)	PC	PC
LED LUMENS	100Lm/W	100Lm/W
SURGE PROTECTION	2.5KV	2.5KV
BEAM ANGLE	120°	120°
MOUNTING	Wall, Ceiling & Surface	Wall, Ceiling & Surface

High Bay Lights



MODEL NO.	ON REQUEST				
POWER	50W	100W Lens Type	150W Lens Type	200W Lens Type	250W Lens Type
LED SIZE	2835	2835	2835	2835	2835
BODY COLOR	Black	Black	Black	Black	Black
IP RATING	IP65	IP65	IP65	IP65	IP65
COLOR TEMP.	6500K	6500K	6500K	6500K	6500K
LUMEN OUTPUT	100 LM/Per Watt	100 LM/Per Watt	100 LM/Per Watt	100 LM/Per Watt	100 LM/Per Watt
MATERIAL	Alluminium Die Cast	Alluminium Die Cast	Alluminium Die Cast	Alluminium Die Cast	Alluminium Die Cast
MOUNTING	Hanging	Hanging	Hanging	Hanging	Hanging

Swivel Down Light (PC Body)



MODEL NO.	HYF-SWC-3W	HYF-SWC-6W	HYF-SWC-9W	HYF-SWC-12W
POWER	3W	6W	9W	12W
TYPE	Round	Round	Round	Round
LED SIZE	2835	2835	2835	2835
BODY COLOR	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20
COLOR TEMP.	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
LUMEN OUTPUT	240Lm	480Lm	720Lm	960Lm
MATERIAL	PC	PC	PC	PC
BEAM ANGLE	45°	45°	45°	45°
MOUNTING	Ceiling	Ceiling	Ceiling	Ceiling

Swivel Aluminium Down Light



MODEL NO.	HYF-SAC-3W	HYF-SAC-6W	HYF-SAC-9W
POWER	3W	6W	9W
LED SIZE	2835	2835	2835
BODY COLOR	White	White	White
IP RATING	IP20	IP20	IP20
COLOR TEMP	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
LUMEN OUTPUT	>270Lm	>540Lm	>810Lm
MATERIAL	Aluminum body	Aluminum body	Aluminum body
BEAM ANGLE	>36°	>36°	>36°
MOUNTING	Ceiling mount	Ceiling mount	Ceiling mount

MODEL NO.	HYF-SAC-12W	HYF-SAC-18W	HYF-SAC-24W	HYF-SAC-30W	HYF-SAC-40W	HYF-SAC-50W
POWER	12W	18W	24W	30W	40W	50W
LED SIZE	2835	2835	2835	2835	2835	2835
BODY COLOR	White	White	White	White	White	White
IP RATING	IP20	IP20	IP20	IP20	IP20	IP20
COLOR TEMP	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
LUMEN OUTPUT	>1080Lm	>1620Lm	>2160Lm	>2700Lm	>3650Lm	>4500Lm
MATERIAL	Aluminum body	Aluminum body	Aluminum body	Aluminum body	Aluminum body	Aluminum body
BEAM ANGLE	>36°	>36°	>36°	>36°	>36°	>36°
MOUNTING	Ceiling mount	Ceiling mount	Ceiling mount	Ceiling mount	Ceiling mount	Ceiling mount

2' x 2' LED Back-Lit Panel



MODEL NO.	HYF-BL-6060-36W	HYF-BL-6060-48W
POWER	36W	W
LED SIZE	2835	2835
BODY COLOR	White	White
IP RATING	IP20	IP20
COLOR TEMP.	3000K, 4000K & 6500K	3000K, 4000K & 6500K
LUMEN OUTPUT	>3500Lm	>4800Lm
MATERIAL	Extruded aluminum	Extruded aluminum
BEAM ANGLE	>120°	>120°
MOUNTING	Grid Ceiling / False Ceiling	Grid Ceiling / False Ceiling





WITH LED LIGHT



WITHOUT LED LIGHT



2*2 SURFACE CEILING / GRID FAN

 www.hyffa.com

Model:	HYF-600X600CFAN 70W		
Specification:	600mm		
Rate voltage/frequency:	220-240V~50Hz		
Watt	70W		
Speed:	860-950 (first gear)	960-1050 (second gear)	1100-1200 (third gear)
Air delivery.	15 m ³ /min (first gear)	21 m ³ /min (second gear)	28m min (third gear)
Noise:	45DB (first gear)	51DB (second gear)	58DB (third gear)
Measurements	63X34x63cm : 2 pcs/box		
Installation size:	60×60cm		

HANGING PROFILE LIGHT



MODEL No.	HYF-ARCPROFILELGT-20 Watt	HYF-ARCPROFILELGT-40 Watt	HYF-ARCPROFILELGT-60 Watt	HYF-ARCPROFILELGT-80 Watt
POWER	20 Watt	40 Watt	60 Watt	80 Watt
LED SIZE	600mm 2 feet	1200mm 4 feet	1800mm 6 feet	2400mm 8 feet
LUMEN OUTPUT	2000 Lm	4000 Lm	6000 Lm	8000 Lm
PROTECTION	4 KV Surge	4 KV Surge	4 KV Surge	4 KV Surge
CUSTOMIZATION	Customization also available	Customization also available	Customization also available	Customization also available
MOUNTING	Hanging	Hanging	Hanging	Hanging
Customization also available				
Available in - 3000k, 4000k, 6500k.			Body Colour - White & Black.	



FOLLOW US

ON OUR SOCIAL NETWORK FOR NEW PRODUCTS
LAUNCH AND UPDATES



<https://www.facebook.com/hyffaleds>

<https://www.instagram.com/hyffaled/>

<https://www.youtube.com/@hyffa-ledlights7997>

<https://www.linkedin.com/company/hyffaled/>

www.hyffa.com



HYFFA LED[®]
EXCELLENT BY NATURE



Marketed By: NICTPL, G. No. 316/A/P, Charohali Kh, Tal. Khed,
District Pune - 410501, Alandi Markal Road, Maharashtra, India.

Email - customer care@hya.com | Customer Care - +91 74991 42940

Disclaimer: Specifications mentioned are based on test reports of the time of preparation of this catalogue. Technical products are under continuous upgradation & specifications may vary 5 - 10 % depending on testing standards/instruments. Value parameters are approximate. Images are for reference purpose, drawn from photographs & rendering. Actual products may vary in appearance. Product applications are mentioned specifically for indoor/outdoor use. Lumens mentioned are for higher CCT (6500K/5000K), for lower CCT (4000K/3000K), lumens reduce at 10 - 15%. In case, IP rating is not specified, it should be considered as Ip20.